


# HR01

## HANDRAIL LED LIGHT SERIES - ASYMMETRICAL




### DISTRIBUTION

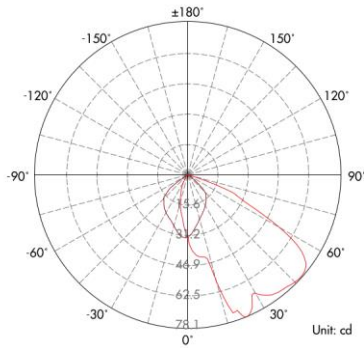

3.281ft	3.003fc	2.117fc	3.726ft
1.0m	32.32lx	22.790lx	1.136m
6.562ft	0.751fc	0.529fc	7.453ft
2.0m	8.080lx	5.698lx	2.272m
9.843ft	0.334fc	0.235fc	11.179ft
3.0m	3.591lx	2.532lx	3.407m
13.123ft	0.188fc	0.132fc	14.906ft
4.0m	2.020lx	1.424lx	4.543m
16.404ft	0.120fc	0.085fc	18.632ft
5.0m	1.293lx	0.912lx	5.679m

Height Center E Beam Angle: 59.2 Average E Diameter

### DIMENSIONS

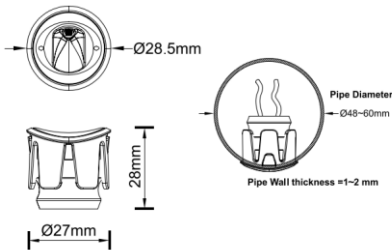

### SPECIFICATIONS

Power	1.5 watts +10%
LED type	1 PC 1W CREE XPE LED
Luminous flux	76~95 lm
CCT	2700K, 3000K, 4000K, 5000K, 6000K
CRI	80+
Beam angle	30°x60° (Tilt x Pan)
Dimension	28.5 x 28 (mm) Diameter x Height
Cut out	27
Net weight	0.048kgs
Warranty	3 years
Certifications	CE, RoHS

Electrical Data	
Input voltage	DC12V / DC24V
Insulation class	Class III
Cable	1PC teflon cable 0.25M 2*0.3mm square
Driver	low voltage constant current output, excluding the transformer

Construction Data	
IP rating	IP67 Waterproof
IK rating	IK06
Housing	Stainless steel 304 for 304 version / Aluminium for 6063 version
Protection finishing	Stainless steel 304 for 304 version / Silver color Anodizing Aluminium for 6063 version
Trim	Stainless steel 304 for 304 version / Silver color Anodizing Aluminium for 6063 version
Glass	/
Loading capacity	110 kgs
Cable Gland	/
Gasket	O-ring PMQ silicone seal

