


LG2215/2215B



SPECIFICATIONS:

| | |
|------------------------|-------------------------------------|
| Material: | AL6063-T5 |
| Surface: | Anodized/ Painting |
| PC cover: | Diffuser /Transparent /Opal/Black |
| Power: | 14.4W/m |
| Input voltage: | 24VDC |
| Lamp beads: | 156LEDs/m (2835) |
| Lighting source width: | 10 mm |
| Available lengths: | 0.5-3m |
| Application: | indoor lighting/ furniture lighting |

SIZE:

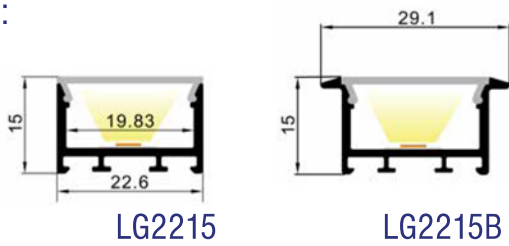

| | | | | |
|-----------|------------------------|-------------------|---------------|--|
| COVER | Trans/Opal/Diffuser | 22152/22153/22154 | | |
| COVER | Black | 2215B | | |
| END CAP | Hole | W/O hole | 22158/22159 | |
| END CAP | Hole | W/O hole | 2215B8/2215B9 | |
| CLIP | | 22150 | | |
| MAGNET | | 1509D019 | | |
| PENDANT | | 2020H | | |
| CONNECTOR | straight connector | 3916017 | | |
| CONNECTOR | 90° Vertical connector | 2525PJLA | | |
| CONNECTOR | 90° connector | 2525PJLB | | |

ACCESSORIES:

straight connector
3916017

90° Vertical connector
2525PJLA

90° connector
2525PJLB



straight connector
3916017


90° connector
2525PJLB



1. put the magnet into the slot 2. Absorbing the metal 3. Installation completed



1. Using screw to fix the clip 2. Pressure 3. Installation completed

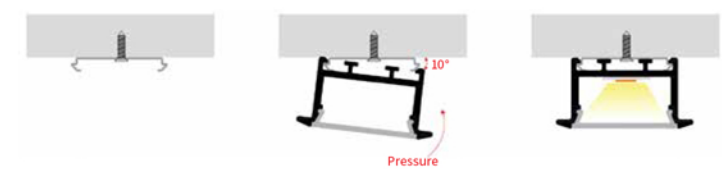

1. Fixing the ceiling fastener on ceiling 2. Fixing the fastener into the aluminum case 3. To install the stainless steel wire through both fastener, installation complete.

