

LS-LR02



IN GROUND LINEAR TRIMLESS RECESSED



SPECIFICATIONS

Model No.	LS-LR02	
Power Consumption(±10%)	9W	23W
Input Voltage	24VDC	
Luminous Flux (±10%)	450-540 lm	1150-1380 lm
Efficacy(4000K Ra80)	50-60 lm/W	
Correlated Color Temperature	4000K (2700k, 3000k, Amber LED Optional)	
Color Rendering Index	80	
Luminaire Length	401mm	1001mm
Luminaire Net Weight	2.2kg	5.4kg
Mounting Option	Recessed In-Ground	
Material	Aluminum and stainless steel body, transparent glass	
Fixture Color	Silver	
IK Rating	IK10	
IP Rating	IP68	
Operating Temperature	-30°C to + 50°C(-22°F to 122°F)	
Life Time of LED @Ta=25°C	50000 Hours	
Warranty	5 Years	
Application	Outdoor, landscape	

DIMENSIONS

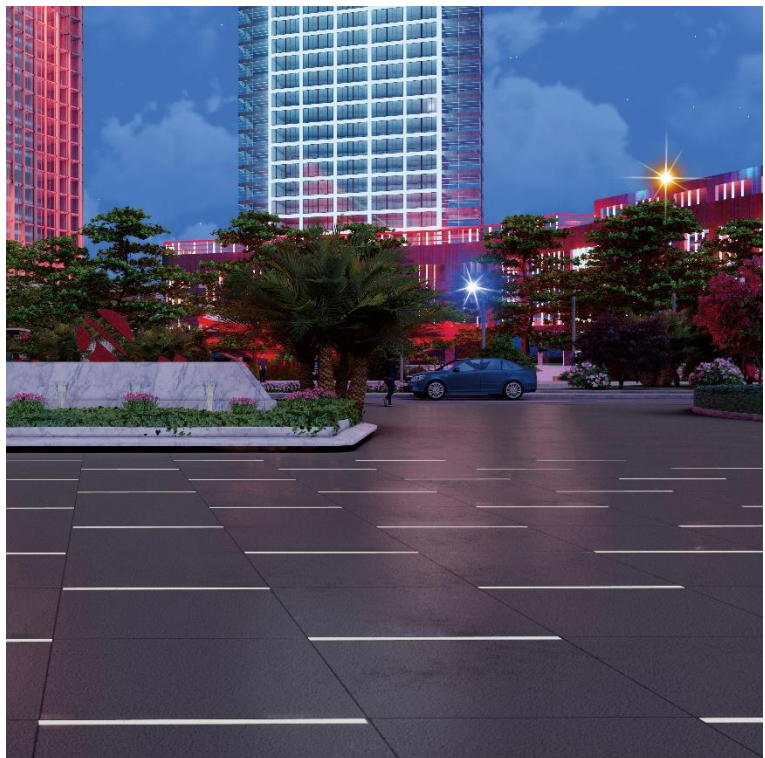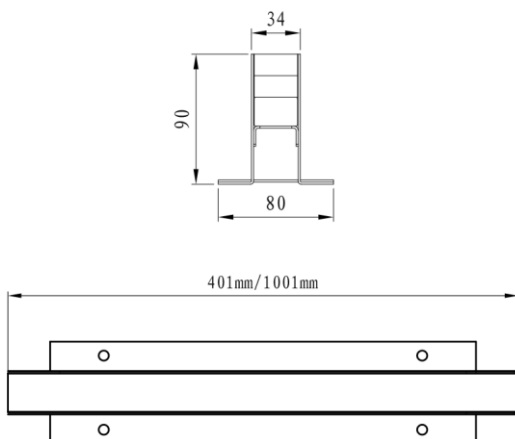

PREMIER

3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca

In-Ground Linear Trim-less Recessed LS-LR02

Last update: Sep. 2023

Page 1 of 1