


# PL-03

## PENDANT LINEAR UP/DOWN LIGHT (SINGLE/LINKABLE)

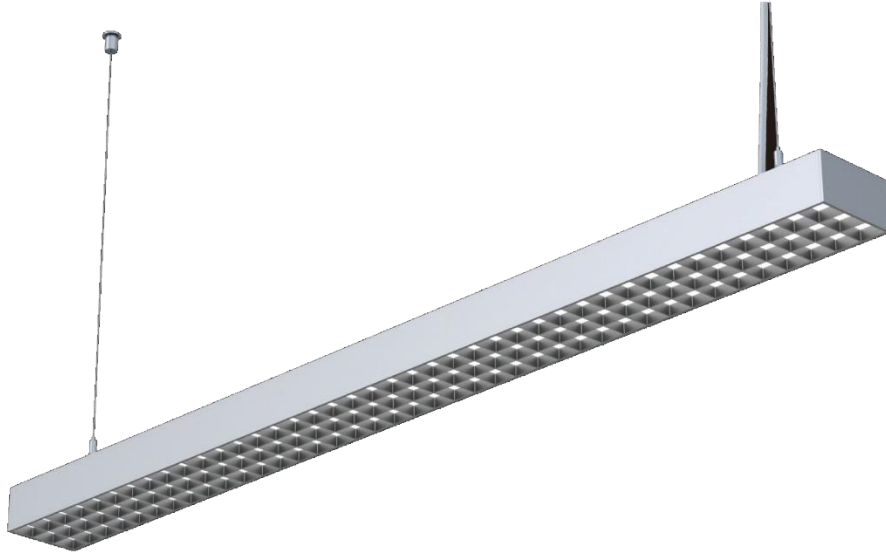


### SPECIFICATIONS

<b>Model No.</b>	PL-03	
<b>Power Consumption(±10%)</b>	30W↑/30W↓	35W↑/35W↓
<b>Input Voltage</b>	120VAC	
<b>Luminous Flux (±10%)</b>	3000lm↑/2700lm↓	3500lm↑/3200lm↓
<b>Efficacy(4000K Ra70)</b>	100 lm/W	
<b>Correlated Color Temperature</b>	3000K/4000K/6000K	
<b>Color Rendering Index</b>	>80	
<b>UGR level</b>	<16	
<b>Dimming</b>	Yes	
<b>Material</b>	Aluminum body, PC lens	
<b>Finish</b>	Powder Coating	
<b>Fixture Color</b>	White/Silver	
<b>IP Rating</b>	IP20	
<b>Life Time of LED @Ta=25°C</b>	50000 Hours	
<b>Warranty</b>	5 Years	
<b>Application</b>	Open space office, meeting room and other office applications	

# PL-03

## PENDANT LINEAR UP/DOWN LIGHT (SINGLE/LINKABLE)

### DIMENSIONS

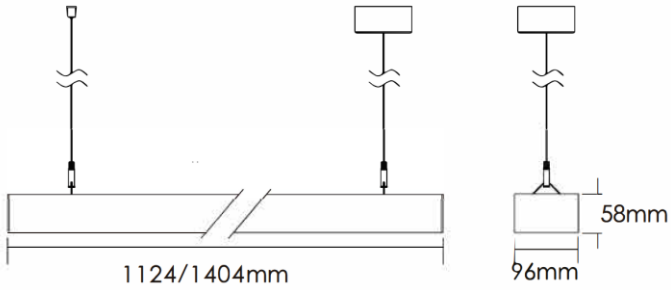

### DISTRIBUTION

