

BL-03


LANDSCAPE BOLLARD

SPECIFICATIONS







Model No.	BL-03		
Power Consumption(±10%)	12W/24W	24W	24W
Input Voltage	120VAC		
Luminous Flux (±10%)	505lm/1162lm	1162lm	1162lm
Efficacy(4000K Ra70)	48 lm/W		
Correlated Color Temperature	4000K		
Color Rendering Index	>80		
Total Flux at and above 90°	<3%		
Dimming	Yes		
Control	Bluetooth and radar sensor		
Material	Aluminum body, PC lens with UV filter		
Finish	Powder Coating		
Fixture Color	Black/Silver		
Luminaire Net Weight	2.55kg	4.05kg	5.75kg
Product Dimension	180x180x250mm	180x180x600mm	180x180x1000mm
IP Rating	IP65		
IK Rating	IK08		
Working Temperature	-30°C to +45°C		
Life Time of LED @Ta=25°C	50000 Hours		
Warranty	5 Years		
Application	Outdoor application such as pathways, parks, etc		



DIMENSIONS

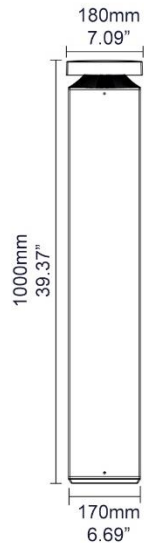

DISTRIBUTION



ORDERING INFORMATION

EXAMPLE: PR-BL03-24-600-4000-80-D-B

SERIES	POWER(W)	HEIGHT(MM)	CCT(K°)	CRI	DIMMING	COLOR
PR-BL03	12	250	4000	80	D: Dali	B: BLACK
	24	250		90	0: None	S: SILVER
		600				
		1000				

