

SPOT50-S

MAGNETIC TRACK SERIES






SPECIFICATIONS

Model No.	Spot50-S
Power Consumption(±10%)	10W
Input Voltage	24VDC
Driver Type	Constant Current (CC)
Dimming	Yes
Luminous Flux (±10%)	688lm
Efficacy(4000K Ra70)	69lm/W
Correlated Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K
Color Rendering Index	Ra80 (Ra90 optional)
Beam Angle	18°, 24°, 36°
UGR level	NA
Mounting Option	Track Mounted
Material	Aluminum Alloy Body, Polycarbonate Optical Lens
Finish	Powder Coating
Fixture Color	Black/White
IP Rating	IP20
Life Time of LED @Ta=25°C	50000 Hours
Warranty	5 Years
Application	Residential, Retail, Office, etc.


DISTRIBUTION

3000K 90Ra

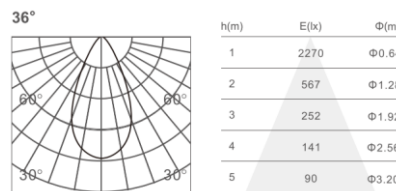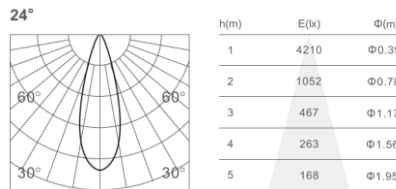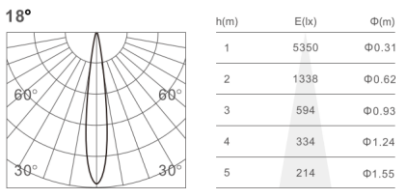


■ Sandy Black □ Sandy White




TRACK ADAPTERS




SENIOR



CURVY



JUNIOR





ORDERING INFORMATION

EXAMPLE: PR-MT-SP50S-S-B-3000-80-T-36

SERIES	TRACK	FIXTURE COLOR	CCT(K°)	CRI	DIMMING	BEAM ANGLE
PR-MT-SP50S	S: Senior	B: Black	2700	80	D: Dali	18°
	J: Junior	W: White	3000	90	T: Triac	24°
	R: Curvy		3500		V: 0-10V	36°
			4000		O: None	
			5000			