

SPOT70

MAGNETIC TRACK SERIES




SPECIFICATIONS

Model No.	Spot70
Power Consumption(±10%)	20W
Input Voltage	24VDC
Driver Type	Constant Current (CC)
Dimming	Yes
Luminous Flux (±10%)	1450lm
Efficacy(4000K Ra70)	73lm/W
Correlated Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K
Color Rendering Index	Ra80 (Ra90 optional)
Beam Angle	15°, 24°, 36°
UGR level	NA
Mounting Option	Track Mounted
Material	Aluminum Alloy Body, Polycarbonate Optical Lens
Finish	Powder Coating
Fixture Color	Black/White
IP Rating	IP20
Life Time of LED @Ta=25°C	50000 Hours
Warranty	5 Years
Application	Residential, Retail, Office, etc.


DISTRIBUTION

3000K 80Ra

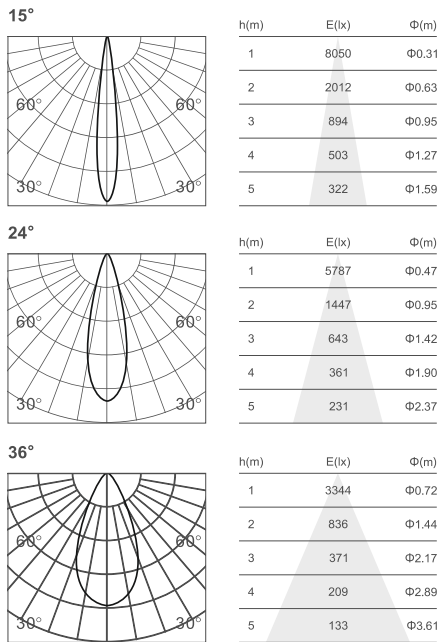

■ Sandy Black □ Sandy White

TRACK ADAPTERS

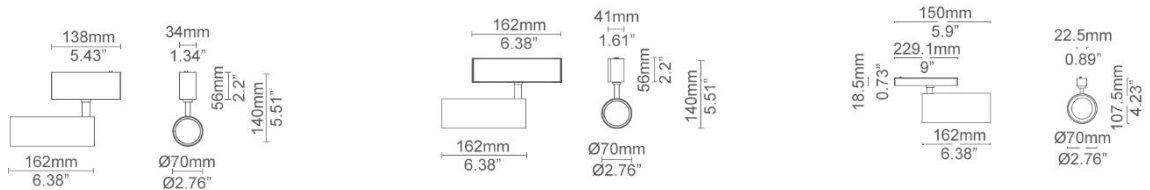



ORDERING INFORMATION

EXAMPLE: PR-MT-SP70-S-B-3000-80-T-36

SERIES	TRACK	FIXTURE COLOR	CCT(K°)	CRI	DIMMING	BEAM ANGLE
PR-MT-SP70	S: Senior	B: Black	2700	80	D: Dali	15°
	J: Junior	W: White	3000	90	T: Triac	24°
	R: Curvy		3500		V: 0-10V	36°
			4000		O: None	
			5000			