



SEGMENT ASSEMBLY

1 PROFILE CONNECTION

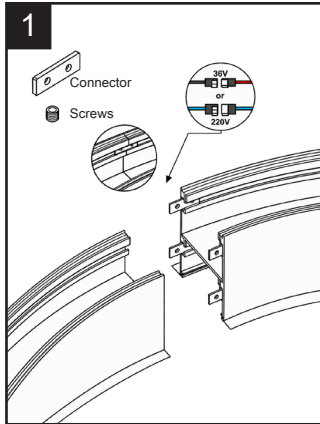


Step 1

First, connect the wire.
Second, install the connector.
Third, fix the screws.

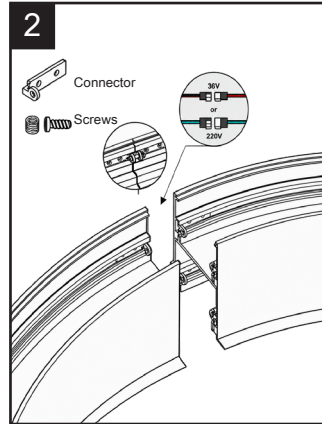


Step 2

First, connect the wire.
Second, install the connector.
Third, fix the screws.

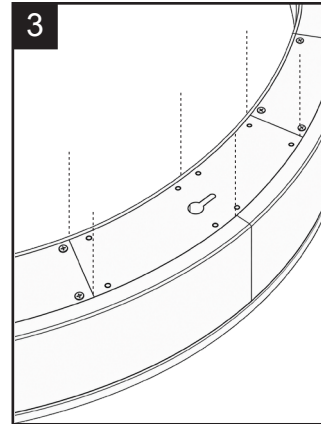

Step 3


Install the profiles top cover.

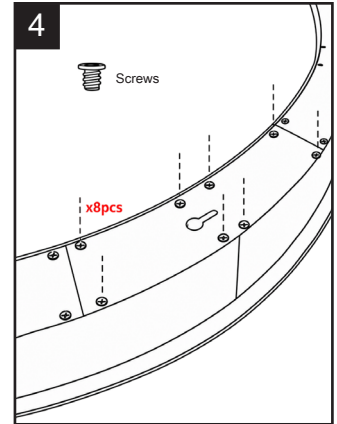

Step 4


After install the profiles top cover,
fixed them with screws.

2 COVER CONNECTION

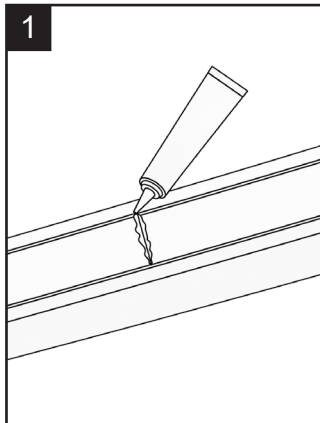


Step 5

Fill the gap with glue.

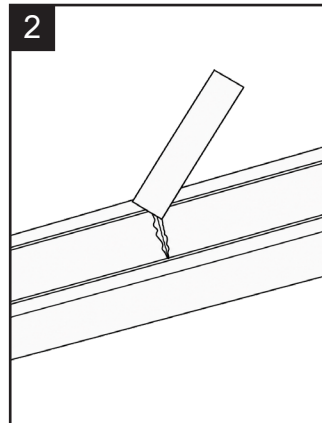


Step 6

Make glue smooth with a scraper.

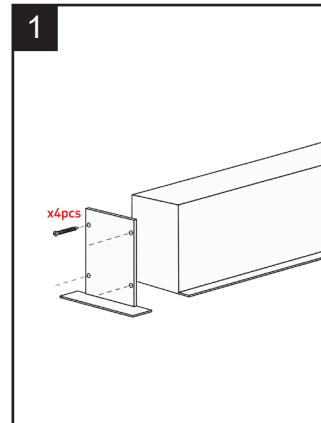

Step 7

Align the end cap with the profile
end.

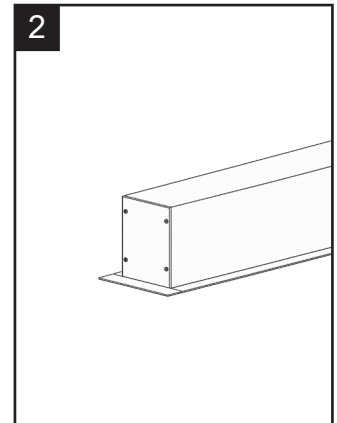

Step 8

Fix the end cap to the end of the
profile with screws.

3 END CAP INSTALLATION

INSTALLATION INSTRUCTIONS - RECESSED MOUNT WITH U-SHAPED BRACKET

Please read these instructions carefully before commencing installation and retain for future reference. If in doubt, we advise that you consult a qualified electrician to install the product. These products must not be modified. If any modification is made it may invalidate the warranty and may render the product unsafe. All electrical installations must be carried out according to national electrical code & local regulations.


Important Safety Notes

1. Switch off the electricity at the mains before commencing installation (if a fuse box is used) remove the appropriate circuit fuse to avoid accidental switching on of the mains supply.
2. Make sure all connections are tight with no loose strands.
3. Ensure fire regulations are not breached when fitting your lights.
4. If you are in any doubt regarding these instructions, consult a qualified electrician.

Mounting Bracket Layout by Diameter


Diameter	Layout	No. of Mounting Bracket
<1.2m		4pcs
1.5/ 1.8/ 2.4m		4pcs
3.0/ 3.6m		6pcs
4.0/ 5.0m		8pcs
6.0/ 7.0m		12pcs

1 CUT CEILING OPENING

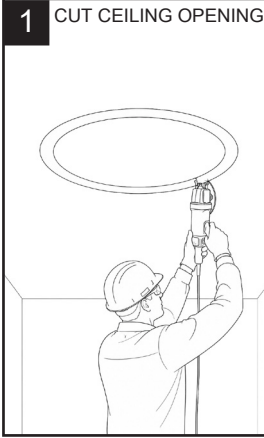


Cut the ceiling opening according to the luminaire dimensions.

2 REMOVE PROFILE COVER

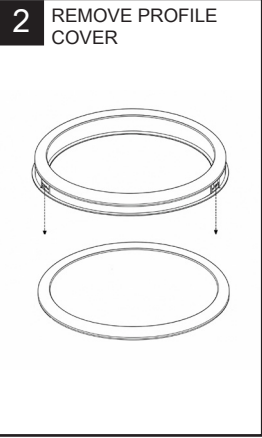


Remove the cover to access the LED kit and mounting point.

3 INSTALL THE MOUNTING PIN

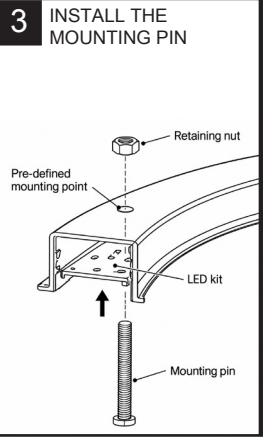


Insert the pin through the LED kit and profile. Secure with the retaining nut.

4 INSERT THE U-SHAPED BRACKET

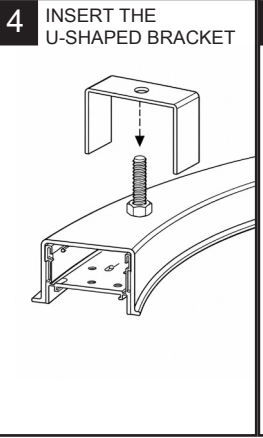

Place the U-shaped rotating bracket onto the mounting pin.

5 SET THE BRACKET CLEARANCE

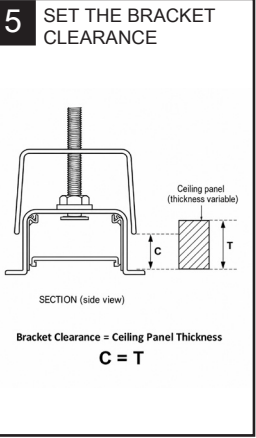


Adjust the bracket height to match the ceiling thickness.

SECTION (side view)

Bracket Clearance = Ceiling Panel Thickness


$C = T$

6 LOCK THE BRACKET POSITION

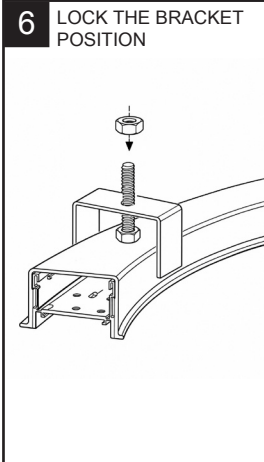


Tighten the locking nut to prevent vertical movement.

7 MOUNT LUMINAIRE

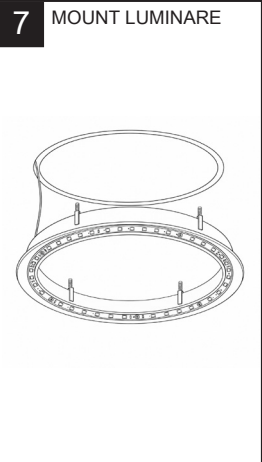

Align bracket with the profile and lift the ring into the cut-out.

8 ROTATE & SECURE THE BRACKET

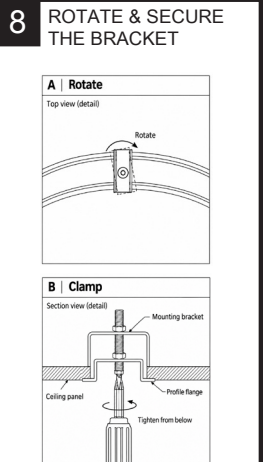


Turn the pin from below until the bracket rotates into position and locks behind the ceiling, securing the profile in place.

A | Rotate
Top view (detail)
Rotate


B | Clamp
Section view (detail)
Mounting bracket
Ceiling panel
Profile flange
Tighten from below

9 REINSTALL THE PROFILE COVER

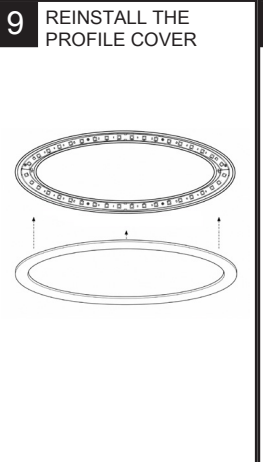

Check the fixing and alignment, then reinstall the cover.

10 FINISHED INSTALLATION

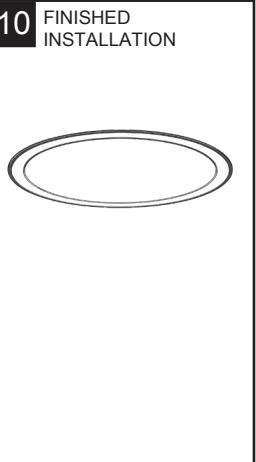

Recessed luminaire installed and ready for operation.

INSTALLATION INSTRUCTIONS - RECESSED MOUNT WITH SPRING CLIP

Please read these instructions carefully before commencing installation and retain for future reference. If in doubt, we advise that you consult a qualified electrician to install the product. These products must not be modified. If any modification is made it may invalidate the warranty and may render the product unsafe. All electrical installations must be carried out according to national electrical code & local regulations.

Important Safety Notes

1. Switch off the electricity at the mains before commencing installation (if a fuse box is used) remove the appropriate circuit fuse to avoid accidental switching on of the mains supply.
2. Make sure all connections are tight with no loose strands.
3. Ensure fire regulations are not breached when fitting your lights.
4. If you are in any doubt regarding these instructions, consult a qualified electrician.

Spring Clips Layout by Diameter

Diameter	Layout	No. of Mounting Bracket
<1.2m		4pcs
1.5/ 1.8/ 2.4m		4pcs
3.0/ 3.6m		6pcs
4.0/ 5.0m		8pcs
6.0/ 7.0m		12pcs

1 ATTACH SPRING CLIPS

Attach the required number of mounting spring clips to the luminaire according to the selected ring diameter.

2 CUT CEILING OPENING

Cut the ceiling opening according to the luminaire dimensions.

3 ELECTRICAL CONNECTION

Connect the main supply cable to the driver inside the profile. Secure the wiring and reinstall the cover.

4 MOUNT LUMINARE

Insert the luminaire into the ceiling opening while keeping the spring clips open.

5 MOUNT LUMINARE

Release the spring clips to secure the fixture firmly in the ceiling.

6 FINISHED INSTALLATION

Recessed luminaire installed and ready for operation.