



INSTALLATION INSTRUCTIONS

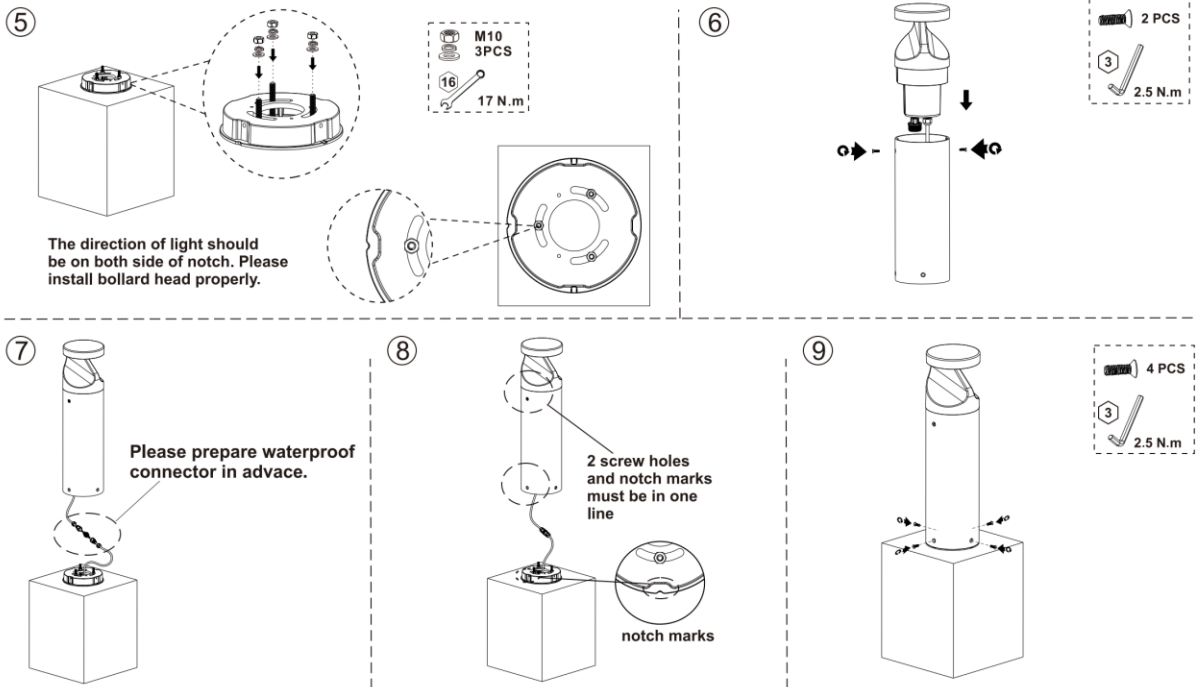

CCT+Power Selectable

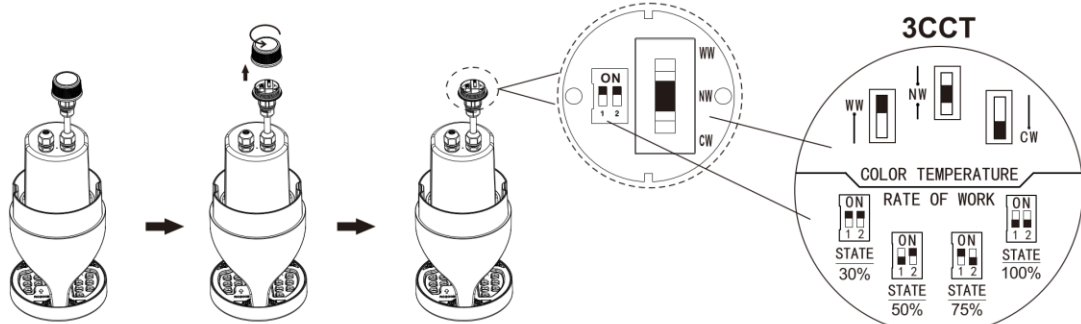

Product Specifications	15W	
Input Voltage	120-277Vac	
Power Frequency	50 / 60 Hz	
Outlook Dimensions	Ø135x500mm(Ø5.31"x19.69")	Ø135x1092mm(Ø5.31"x43")
Net Weight	4.1±0.3kg(9.03±0.66Lbs)	6±0.3kg(13.21±0.66Lbs)
Working Temperature	-30°C to +45°C(-22°F to +113°F)	
Storing Temperature	-40°C to +70°C(-40°F to +158°F)	

AC cords

L	brown	black
N	blue	white
⊕	yellow/green	green

DIM cords

Note: color for dim cords subject to the cable label on luminaire



Warning! do not wire dim cord to high voltage, or dim function will fail.

- This luminaire can be outdoor use.
- For type Y attachments:
if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.