





LP2926

LED LINEAR LIGHT PROFILE SPECIFICATIONS

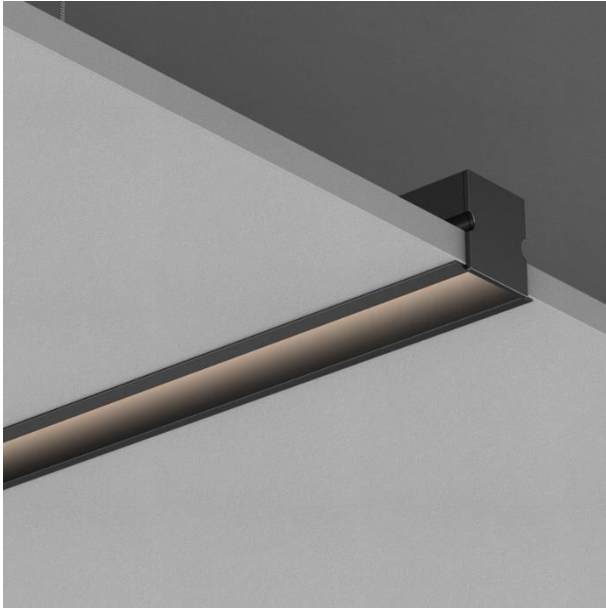

Job Information	
Project Name	
Type	
Location	
Quantity	
Date	



- SILVER 
- BLACK 
- WHITE 


DESCRIPTION

Designed for recessed mounting in tile, masonry, or drywall, this aluminum profile provides a sleek, architectural lighting solution for precise construction details. It can also be configured as a pendant fixture. Ideal for creating seamless continuous light lines in custom surfaces, it is offered in 10' lengths with multiple width and depth options to match project requirements perfect for residential, commercial, and hospitality applications where clean aesthetics and durability are essential.

PERFORMANCE

MODEL NAME	LP2926
MOUNTING OPTIONS	RECESSED/PENDANT
LIGHT SOURCE TYPE	COB/SMD LED STRIP
LIGHT SOURCE WIDTH	12 mm MAX
PC COVER	OPAL/TRANSPARENT/DIFFUSER
FINISH	ANODIZED PAINTING
COLOR	BLACK/WHITE/SILVER
IP	20
APPLICATIONS	INTERIOR, RESIDENTIAL, COMMERCIAL

DIMENSIONS

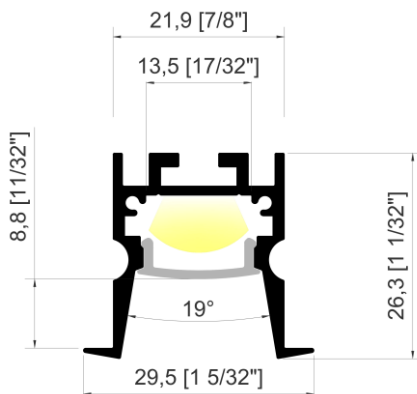

LP2926

LED LINEAR LIGHT PROFILE SPECIFICATIONS

PRODUCT ORDERING GUIDE

EXAMPLE: LP2926-3M-SL-O

SERIES	LENGTH	REFLECTOR FINISH	PC COVER
LP2926	1M	WH: WHITE	O: OPAL
	2M	SL: SILVER	C: CLEAR
	3M	BK: BLACK	D: DIFFUSER

