


LINEAR96

MAGNETIC TRACK SERIES



■ Sandy Black □ Sandy White

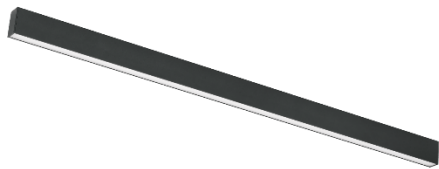


SPECIFICATIONS

Model No.	Linear96
Power Consumption(±10%)	39W
Input Voltage	24VDC
Driver Type	Constant Current (CC)
Dimming	Yes
Luminous Flux (±10%)	2550 lm
Efficacy(4000K Ra70)	65 lm/W
Correlated Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K
Color Rendering Index	Ra80 (Ra90 optional)
Beam Angle	Diffuse
Mounting Option	Track Mounted
Material	Aluminum Alloy Body, PC Optical Lens
Finish	Powder Coating
Fixture Color	Black/White
IP Rating	IP20
Operating Temperature	-30°C to + 50°C(-22°F to 122°F)
Life Time of LED @Ta=25°C	50000 Hours
Warranty	5 Years
Application	Residential, Retail, Office, etc.

DISTRIBUTION


3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	962	Φ2.53
2	240	Φ5.06
3	107	Φ7.60
4	60	Φ10.13
5	38	Φ12.66

DIMENSIONS

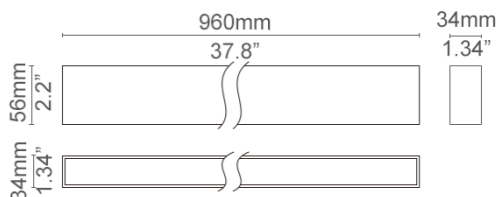

3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca

Magnetic Track -Linear96

Last update: Feb. 2024

Page 1 of 2

LINEAR96

MAGNETIC TRACK SERIES



ORDERING INFORMATION

EXAMPLE: PR-MT-LN96-S-B-3000-80-T-D

SERIES	TRACK	FIXTURE COLOR	CCT(K°)	CRI	DIMMING	BEAM ANGLE
PR-MT-LN96	S: Senior	B: Black W: White	2700 3000 3500 4000 5000	80 90	D: Dali T: Triac V: 0-10V O: None	D: Diffuse



3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca

Magnetic Track -Linear96

Last update: Feb. 2024

Page 2 of 2