

OWL01

OUTDOOR WALL LIGHT SPECIFICATIONS



| Job Information | |
|-----------------|--|
| Project Name | |
| Type | |
| Location | |
| Quantity | |
| Date | |

DESCRIPTION

With its unique and modern design, the OWL01 is an excellent choice for commercial applications. This wall pack is engineered to deliver ambient lighting with a clean aesthetic, making it ideal for building facades, entrances, and public spaces. It is available in a wide range of power options to suit various project requirements.

OVERVIEW

- High-efficacy wall light
- Selectable power and CCT
- IP66-rated for wet locations
- IK10-rated for extreme durability

PERFORMANCE

| | |
|--------------------------|---|
| MODEL NAME | OWL01 |
| POWER CONSUMPTION(±10%) | 4W/7W/11W/15W 10W/17W/26W/35W |
| INPUT VOLTAGE | 120-277VAC |
| EFFICACY(4000K RA80) | 130 LM/W 130 LM/W |
| DIMMING | TRIAC/0-10V/DALI |
| CCT | 3000K/4000K/5000K SELECTABLE |
| CRI | 70/80 |
| BEAM ANGLE | U00C04 |
| MATERIAL | DIE CASTING ALUMINUM |
| FINISH | BLACK |
| DIMENSIONS | 293x289x97mm(11.53"x11.38"x3.81") |
| OPTIONAL ACCESSORIES | PHOTOCELL |
| IP RATING | IP66 |
| IK RATING | IK10 |
| SURGE PROTECTION | L-N 2KV,L&N-PE 4KV |
| POWER FACTOR | >0.92 |
| OPERATING TEMPERATURE | -20°C TO + 55°C(-4°F TO 131°F) |
| LIFESPAN OF LED @TA=25°C | 54000HRS-L90 82000HRS-L80 131000HRS-L70 |
| WARRANTY | 5 YEARS |

OWL01

OUTDOOR WALL LIGHT SPECIFICATIONS


PRODUCT ORDERING GUIDE

EXAMPLE: OWL01-15-80-V-PC

| SERIES | WATTAGE(W) | CRI | DIMMING | OPTIONS |
|--------|------------|----------|---------------------------------|---------------|
| OWL01 | 15 35 | 70 80 | T: TRIAC V: 0-10V N: None | PC: PHOTOCELL |




OPTIONAL PHOTOCELL CONTROL

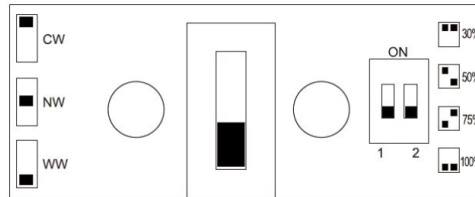

POWER/CCT SELECTABLE

DISTRIBUTION

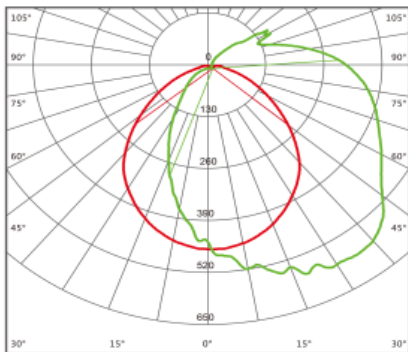

U00C04

DIMENSIONS

