


WS01

WALL SCONCE LED LIGHT SPECIFICATIONS




Job Information	
Project Name	
Type	
Location	
Quantity	
Date	



DESCRIPTION

WS-01 A sleek, 4" indoor fixture designed for either up or down lighting. Operates on 24VDC with a remote driver, ideal for low-voltage architectural applications. Available in White, Black, and Brushed Silver finishes.

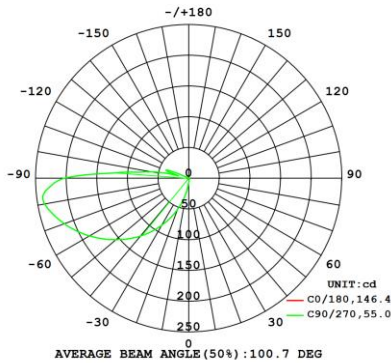

PERFORMANCE

MODEL NAME	WS01
POWER CONSUMPTION(±10%)	6 W
INPUT VOLTAGE	24VDC
LUMINOUS FLUX (±10%)	338 LM
EFFICACY(4000K RA80)	56 LM/W
CCT	2700K/3000K/4000K
CRI	90
MATERIAL	DIE-CASTING ALUMINUM, PMMA DIFFUSER
FINISH	BLACK/WHITE/BRUSHED NICKLE
DIMENSIONS	Ø110x62mm (Ø4.33"x2.44")
IP RATING	IP20
OPERATING TEMPERATURE	-20°C TO + 55°C (-4°F TO 131°F)
LIFESPAN OF LED @TA=25°C	50000HRS
WARRANTY	5 YEARS
APPLICATION	INDOORS ONLY

PRODUCT ORDERING GUIDE

EXAMPLE: WS01-24-6-3000-N-B

SERIES	VOLTAGE-WATTAGE(W)	CCT	DIMMING	FINISH
WS01	24-6: 24VDC, 6W	2700	T: TRIAC	B: BLACK
		3000	V: 0-10V	W: WHITE
		4000	N: NONE	BN: BRUSHED NICKLE