GLORA-S

MAGNETIC TRACK PENDANT FIXTURE SPECIFICATIONS



Job Information	
Project Name	
Type	
Location	
Quantity	
Date	

DESCRIPTION

GLORA-S is a contemporary LED pendant that brings together minimalist design and functional illumination.
Defined by its elegant conical shade and slender silhouette, GLORA-S adds a refined architectural accent to a variety of interior spaces. Its glass element provides smooth, uniform light output, making it suitable for both decorative and general lighting applications.
The discreet mounting connection enhances its clean, streamlined appearance, creating a seamless visual integration with the supporting structure.
Available with both magnetic track and ceiling canopy mounting options, GLORA-S offers flexibility for different lighting layouts and architectural requirements.
With high color rendering, multiple color temperature options, and support for Triac, 0/1–10V, and DALI dimming systems, GLORA-S combines visual comfort, lighting performance, and versatility for residential and commercial environments.

OVERVIEW

- 90 color rendering index (CRI), produces outstanding illumination.
- Color temperature options: 2700K / 3000K / 3500K / 4000K
- Suitable for decorative and general lighting
- Magnetic track or ceiling canopy mounting options
- Triac, 0/1–10V, and DALI dimming options
- Ideal for residential and commercial applications

PERFORMANCE

MODEL NAME	GLORA-S
POWER CONSUMPTION(±10%)	10W
INPUT VOLTAGE	24VDC / 120 VAC , 50/60Hz
LUMINOUS FLUX	265Lm
DIMMING	Triac/0-10V/1-10V/DALI
CCT	2700/3000/3500/4000K
CRI	90
BEAM ANGLE	65°
MOUNTING OPTION	Magnetic Track Head / Surface Mount
TYPE	Pendant
BODY COLOR	Black/White/Silver/Gold
DIMENSION	Ø6.65" (Ø169mm)
IP RATING	IP20
APPLICATIONS	Indoor
CERTIFICATIONS	cETL Listed
WARRANTY	3 Years

@PREMIER Lighting. All right reserved. Product design and development is an ongoing process by PREMIER Lighting. We reserve the right to change specifications. Contact PREMIER for the latest product information or visit www.premierlight.ca for more.

3740 William St, Burnaby, BC V5C 3H7 | Phone: +1 (604) 294-2334 | Toll free: +1 (877) 294-2334 | Fax: +1 (604) 294-2126

GLORA-S

MAGNETIC TRACK PENDANT FIXTURE SPECIFICATIONS



SPECIFICATIONS

OPTICS

A 65° beam angle delivers smooth, directed illumination for both decorative and general lighting applications. Multiple color temperature options and dimming capabilities allow for flexible lighting control, helping create the desired ambiance.

ELECTRICAL

Voltage: 24VDC / 120 VAC , 50/60Hz

ENVIRONMENT & CERTIFICATIONS

cETL listed for dry locations

WARRANTY

3 years limited warranty

MOUNTING

- Magnetic track installation allows easy plug and play rearrangement.
- Surface mount with ceiling canopy.

FINISH

The powder coated finish ensures a uniform appearance, offering long term durability and superior aesthetics.

HOUSING MATERIAL

Die cast aluminum housing ensures durability and efficiency, with heat resistance polycarbonate lens.

LED SYSTEM

CRI	With +90 color rendering index (CRI), this product delivers outstanding illumination, featuring tight chromatically specifications and a precise color binning process to ensure consistency in CRI and CCT.
CCT	Available in 2700K, 3000K, 3500K, 4000K with excellent color consistency.


@PREMIER Lighting. All right reserved. Product design and development is an ongoing process by PREMIER Lighting. We reserve the right to change specifications. Contact PREMIER for the latest product information or visit www.premierlight.ca for more.


3740 William St, Burnaby, BC V5C 3H7 | Phone: +1 (604) 294-2334 | Toll free: +1 (877) 294-2334 | Fax: +1 (604) 294-2126

PRODUCT MODELS & DIMENSIONS

Magnetic Track Head




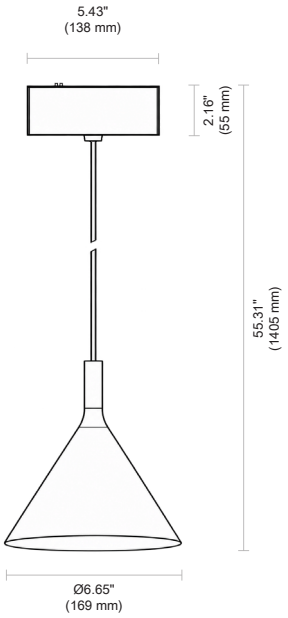

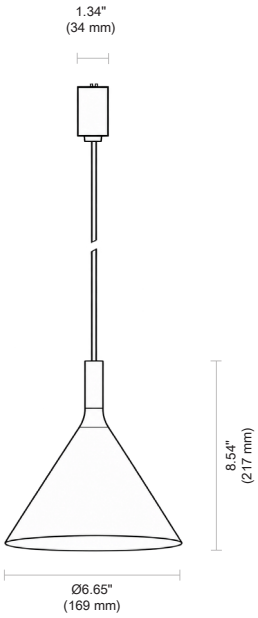

Surface Mount



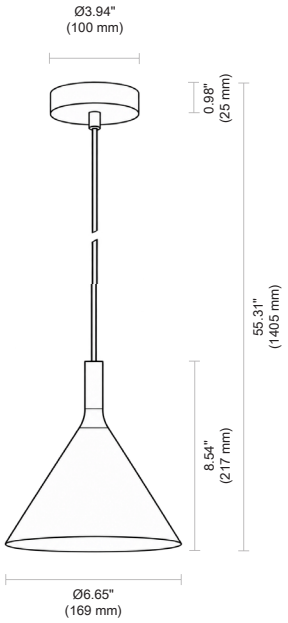

@PREMIER Lighting. All right reserved. Product design and development is an ongoing process by PREMIER Lighting. We reserve the right to change specifications. Contact PREMIER for the latest product information or visit www.premierlight.ca for more.

3740 William St, Burnaby, BC V5C 3H7 | Phone: +1 (604) 294-2334 | Toll free: +1 (877) 294-2334 | Fax: +1 (604) 294-2126

BODY COLOR



Black



White




Silver




Gold

LIGHT DISTRIBUTION



Average Beam Angle(50%):65°



Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

PRODUCT ORDERING GUIDE

EXAMPLE: GLORA-S-MT-30K-V0-BL

GLORA-S	-MT	-30K	-V0	-BL
Model	Installation	CCT	Dimming	Finish

MODEL	INSTALLATION	CCT	DIMMING	FINISH
GLORA-S	MT: Magnetic Track Head CS: Ceiling Surface Mount	27K: 2700K 30K: 3000K 35K: 3500K 40K: 4000K	T: Triac V0: 0-10V V1: 1-10V D: DALI N: None	BL: Black WH: White SL: Silver GL: Gold BLWH: Outside Black Inside White WHBL: Outside White Inside Black

Note: The standard suspension cable length is 3.28' (1000 mm). For custom lengths, specify the required cable length at the end of the order number.
EXAMPLE: GLORA-S-MT-30K-V0-BL-2000mm

@PREMIER Lighting. All right reserved. Product design and development is an ongoing process by PREMIER Lighting. We reserve the right to change specifications. Contact PREMIER for the latest product information or visit www.premierlight.ca for more.

3740 William St, Burnaby, BC V5C 3H7 | Phone: +1 (604) 294-2334 | Toll free: +1 (877) 294-2334 | Fax: +1 (604) 294-2126