

LINEAR16-D9

MAGNETIC TRACK SERIES - CURVY




SPECIFICATIONS

■ Sandy Black □ Sandy White

Model No.	Linear16-D9
Power Consumption(±10%)	7W
Input Voltage	24VDC
Driver Type	Constant Current (CC)
Dimming	Yes
Luminous Flux (±10%)	485 lm
Efficacy(4000K Ra70)	69 lm/W
Correlated Color Temperature	2700K, 3000K, 3500K, 4000K, 5000K
Color Rendering Index	Ra80 (Ra90 optional)
Beam Angle	Diffuse
Mounting Option	Track Mounted
Material	Aluminum Alloy Body, PC Optical Lens
Finish	Powder Coating
Fixture Color	Black/White
IP Rating	IP20
Operating Temperature	-30°C to + 50°C(-22°F to 122°F)
Life Time of LED @Ta=25°C	50000 Hours
Warranty	5 Years
Application	Residential, Retail, Office, etc.


DIMENSIONS

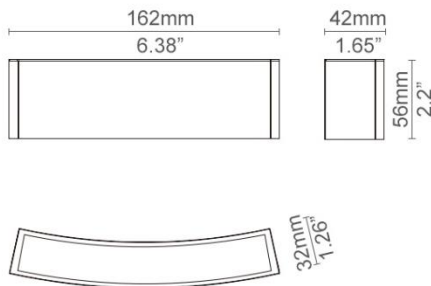

DISTRIBUTION

3000K 90Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	182	Φ2.56
2	45	Φ5.12
3	20	Φ7.68
4	11	Φ10.24
5	7	Φ12.80



3740 William St, Burnaby, BC V5C 3H7

Phone: +1 (604) 294-2334, Toll free: +1 (877) 294-2334, Fax: +1 (604) 294-2126

www.premierlight.ca


Curvy Magnetic Track -Linear16-D9

Last update: Feb. 2024

Page 1 of 2

LINEAR16-D9

MAGNETIC TRACK SERIES - CURVY

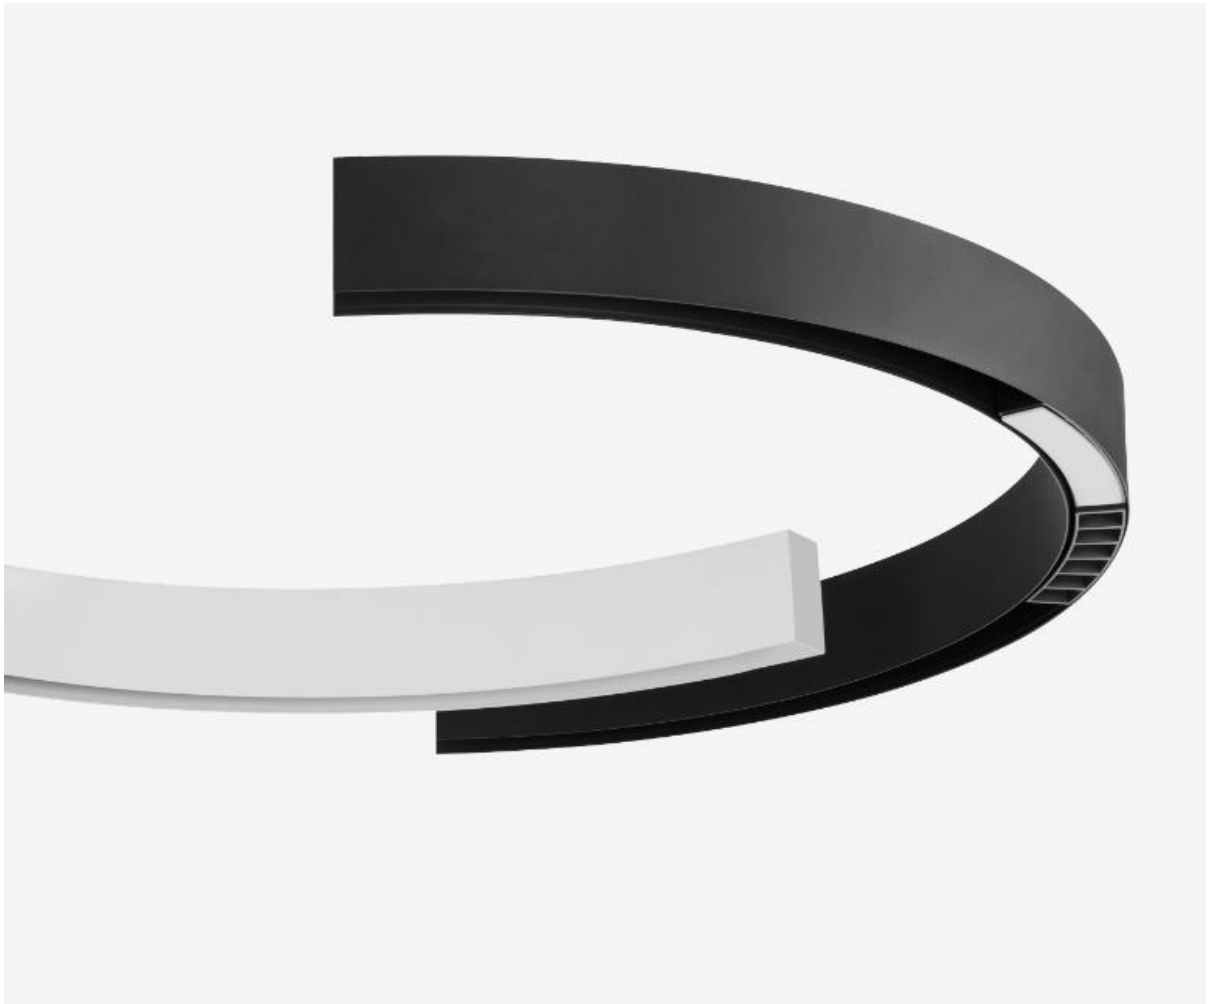

ORDERING INFORMATION

EXAMPLE: PR-MT-LN16D9-S-B-3000-80-T-D

SERIES	TRACK	FIXTURE COLOR	CCT(K°)	CRI	DIMMING	BEAM ANGLE
PR-MT-LN16D9	S: Senior	B: Black	2700	80	D: Dali	D: Diffuse
		W: White	3000	90	T: Triac	
			3500		V: 0-10V	
			4000		O: None	
			5000			

